


MINIRADO MC

WALLWASHER ARMATÜRLER
WALLWASHER LUMINAIRES

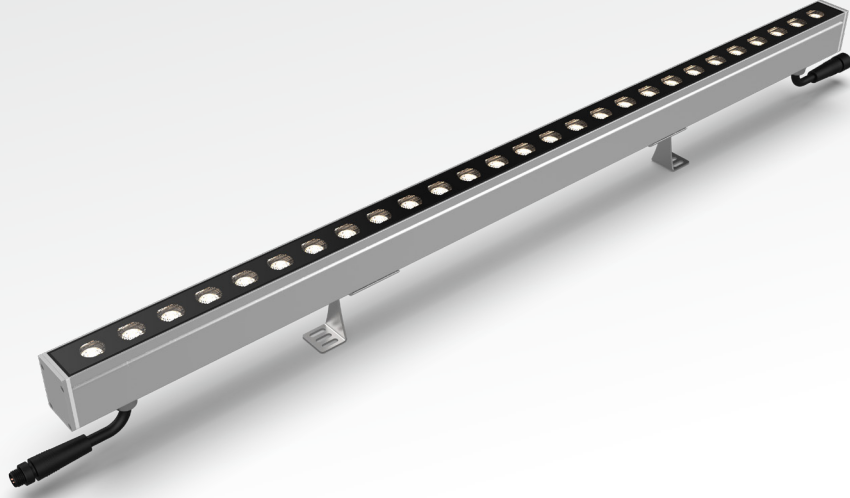

Minirado MC, duvar boyama, endirek aydınlatma, yüzey aydınlatma gibi birçok uygulama için özelleştirilmiş, yüksek dayanıklı bir armatür grubudur. Dahili (110-220VAC) ve harici (24VDC-48VDC) sürücü seçenekleri, farklı boy, lens ve renk opsiyonlarıyla birden fazla özelleştirme seçeneği ile birçok aydınlatma uygulaması için ideal çözümler sunmaktadır. Montaj alanına uygun olarak farklı ayak ve aparatlarla üretilebilmektedir.

Minirado MC is a highly durable luminaire group customized for many applications such as wall painting, indirect lighting, surface lighting. It offers ideal solutions for many lighting applications with internal (110-220VAC) and external (24VDC-48VDC) driver options, multiple customization options with different size, lens and color options. It can be produced with different feet and apparatus in accordance with the mounting area.

Ana Özellikleri

- 24VDC - 48VDC ve 220VAC güç seçenekleriyle çalışma opsiyonu
- Farklı boy, lens ve renk opsiyonlarıyla ihtiyaca uygun kullanım şekli
- Ürüne sabit ayaklar sayesinde hızlı kurulum ve kolay açma imkanı.
- IP68 / IK10 su ve mekaniksel dayanım derecesiyle dış mekan koşullarında güvenle kullanım

Key Features

- Operation options with 24VDC - 48VDC and 220VAC power selections
- Customizable usage according to needs with various sizes, lenses, and color options
- Quick installation and easy adjustment facilitated by fixed feet on the product
- Safe outdoor usage ensured by IP68 / IK10 water and mechanical resistance ratings



Ürün Kodu Product Code	Ürün Tipi Product Type	Uzunluk Length	LED Sayısı LED Qty	Güç Power	Işık Akısı Lumen Output
FWM015009	Tek Renk Monocolor	178	6	6W	120lm/W @4000K
FWM015012		328	9	18W	
FWM015013		328	12	12W	
FWM015016		628	18	36W	
FWM015017		628	24	24W	
FWM015020		928	27	54W	
FWM015021		928	36	36W	
FWM015024		1228	36	72W	
FWM015025		1228	48	48W	

Teknik Özellikler / Technical Specifications


LED Özellikleri / LED Features	Yüksek verimli / High efficiency 3-step MacAdams / 3-step MacAdams LM80 uyumlu / LM80 compliant L90B50>100000
--------------------------------	--

Materyaller / Materials	Eloksallı alüminyum gövde / Anodized aluminium body Paslanmaz bağlantı parçaları / Stainless Steel screws Silikon conta / Silicone rubber gaskets 4mm temperli cam / 4mm tempered glass
-------------------------	--

LED Tipi / LED Type	3030 Mid-Power / 3535 High Power
Giriş / Input	220-240 VAC / 24VDC / 48VDC
Kontrol / Control	PWM / 1-10V DIM / DALI
Renksel Geriverim / CRI	CRI>80 / CRI>90
Optik / Optics	15 / 30 / 45 / 60 / 90 / 15x40 / 22x50

Koruma Sınıfı / IP Rating	IP68
Darbe Dayanımı / IK Rating	IK10
Güvenlik Sınıfı / Safety Class	Class I
Çalışma Sıcaklığı / Operating Temperature	-30°C / +70°C
Enerji Sınıfı / EEC	A++


Işık Rengi / Light Colors



Gövde Rengi / Body Colors



Işık Rengi / Light Colors

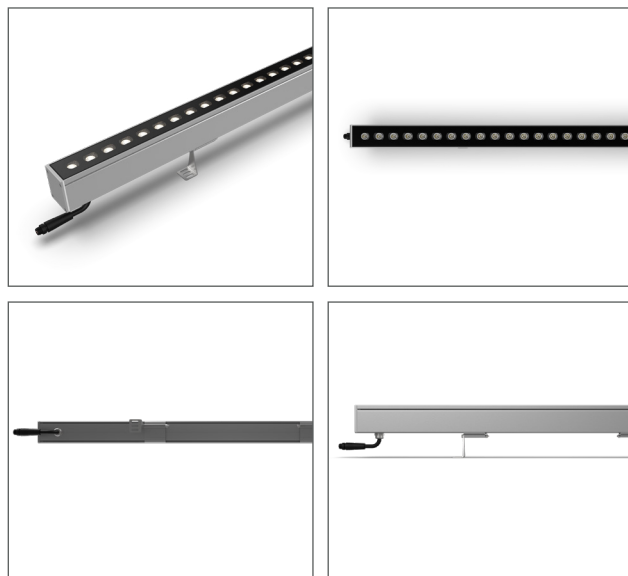

Teknik Resim / Technical Drawing

